



INSTALL INSTRUCTIONS

LED TAIL LIGHT SET: MK7 VW GTI/GOLF R
SKU# 4754 MFG# 5G0945207KT

INSTRUCTIONS ARE ALSO AVAILABLE ONLINE FOR A MORE ENHANCED VIEWING.
PLEASE VISIT WWW.USPMOTORSPORTS.COM AND SEARCH SKU# 4754



TOOLS REQUIRED:

- RAZOR BLADE
- 8MM SOCKET AND RATCHET



SKU# 4754 | MFG# 5G0945207KT

7716 WILES RD. CORAL SPRINGS, FL 33067
WWW.USPMOTORSPORTS.COM


1. Open rear hatch and locate covers behind hatch tail lights. Remove by applying force as shown.




2. Remove covers from both sides.




3a. Locate connectors behind the hatch lights and push red clip to unlock (1). Then push down clip (2) and unplug the harness. Remove two 8mm nuts from rear of each hatch light

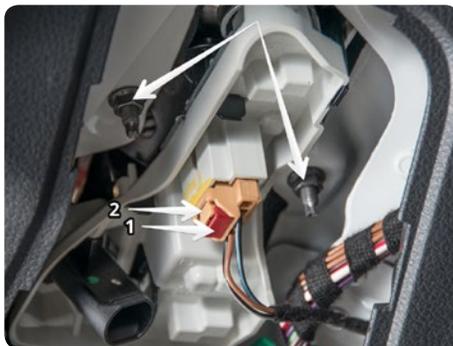


3b. Repeat for opposite side.

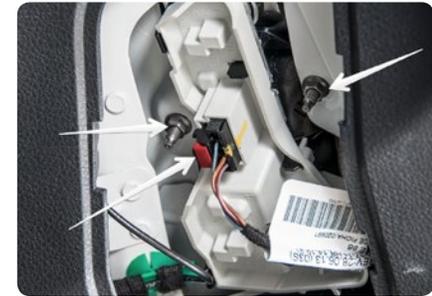


4. Using a razor blade on drivers side plug, cut off protruding tab as shown. Both sides of plug should be flat. Note: this only needs to be done on drivers side plug.

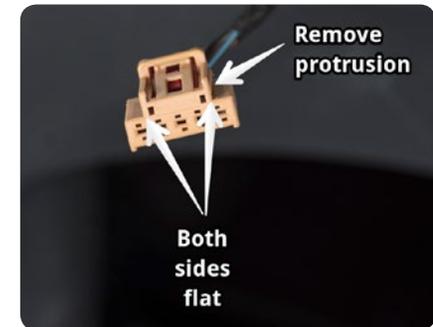

5. Remove hatch lights by first pulling up (1) and then away (2) as shown. Repeat for both sides.

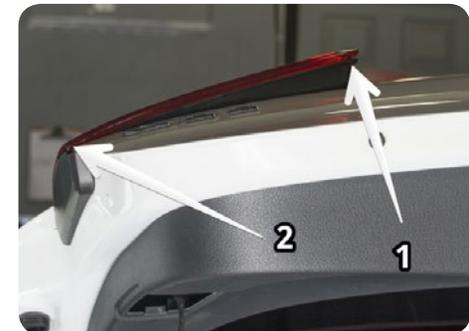


6. Install new tail lights in reverse order. Sliding them in from the outside first (1), then popping them down into place (2).

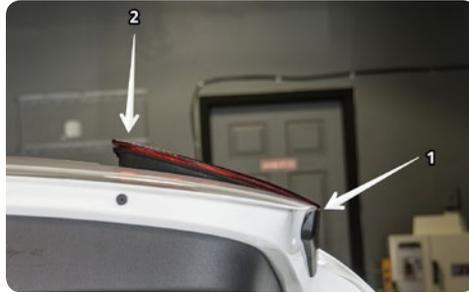

7. Secure new tail lights using OEM 8mm nuts and reconnect harnesses.




8. Locate windows in rear paneling and pop open on both sides.

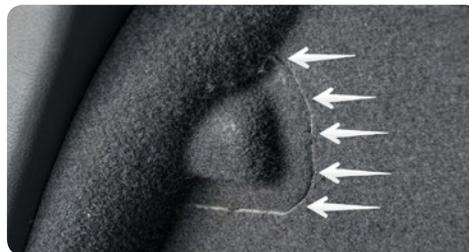

9. Inside paneling windows, loosen and remove plastic wing nut screws.



10. Remove tail lights just enough to reach between them and the body of the car. Release red clip then disconnect harness and remove tail lights. Install new tail lights in reverse order.

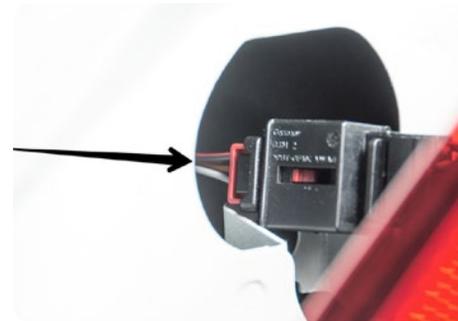

Enjoy your new LED tail lights.

10. Insert locking pin from cylindrical side, until tip of pin pokes out of spherical side.



11. Lock the retaining clip into place by rotating it until it clips into the groove on the gas spring. Repeat for both ends of the gas spring.



12. Repeat process for opposite gas spring.

13. After both gas springs are fully installed, manually lift and lower the hatch 3-4 times without fully engaging the closing latch. A faint compression sound will be heard coming from the dampers, this is normal and will dissipate over time.

Enjoy your automatic hatch pop capabilities!